

# BULLMAC

## DC MOTOR

## SLIDING GATE



Model : BM1500(B)

Model : BM2000(B)



Suitable for the gate from 1000kg - 2000kg



Support backup battery in the event of power failure



DC24V for normal speed  
DC12V for cushion speed




Oil bath gear motor  
Motor rotation speed 3000 RPM



Fast and easy unlock device with release key






Fully built-in compact design

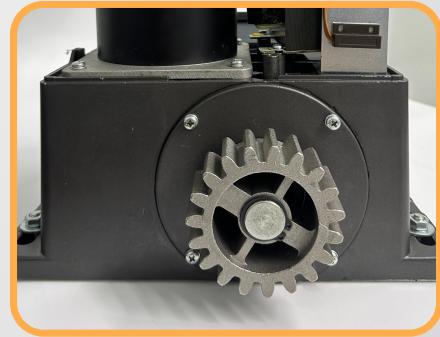

Metal gear with 19 teeth  
Dimension : 82 mm

# DIMENSION

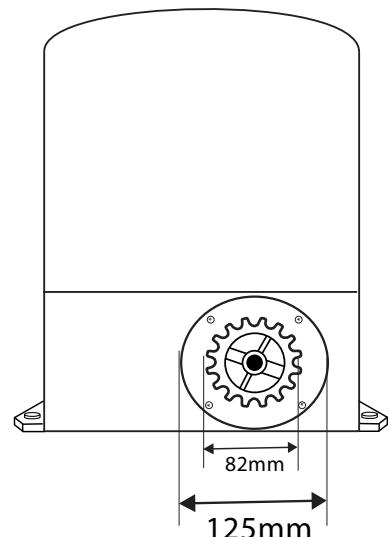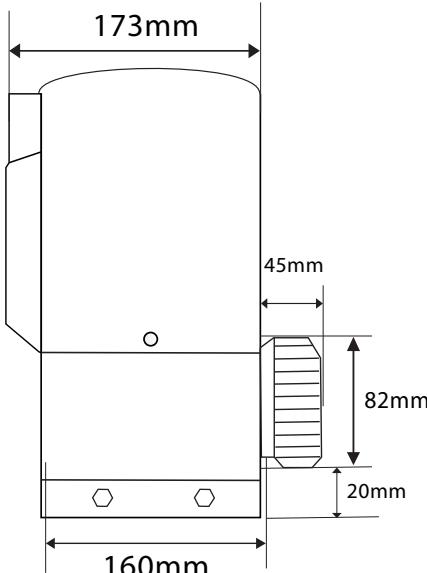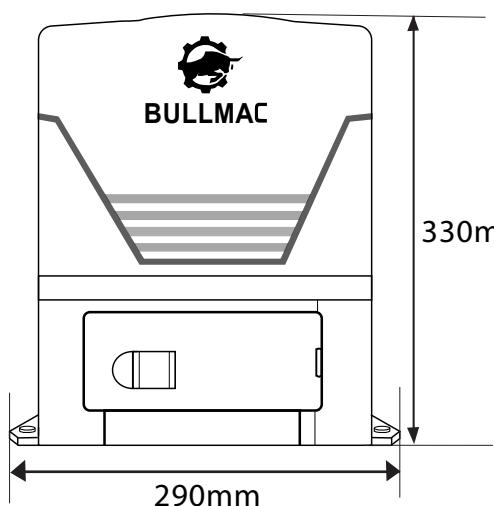

SPECIFICATIONS	BM1500(B)	BM2000(B)
Operating Voltage	DC24V for normal speed ; DC12V for cushioning speed	
Max. Output Power	250W	350W
Max. Weight of Gate	1500kg	2000kg
Max. Length of Gate	10 meter	12 meter
DSPC Device	Magnetic Limit Switch Sensor	
Lubrication	Grease Type   Alloy Base	
Safety Cluth	Electronic current sensing	
Backup Battery	12V 7AH	
Safety Barrier	Infrared beam sensor (Optional)	
Main Supply	AC110V / 220V, 60Hz / 50Hz	
Electronic Controller	Microcomputer based	
Remote Controller	UHF Digital PWM type	
Temperature	0°C to +80°C	

## ACCESSORIES



**CB7530**  
BULLMAX DC Sliding Panel



**RC1-430\_SET (Grey)**  
(1 Receiver, 3 Transmitter)  
433MHZ



**Transformer**  
3AMP Transformer (12V.9V)  
12-9-0-9-12



**GP Battery**  
Backup Battery 12V 7AH



**Release Key**  
Emergency Release  
Key x 2pcs



**Gear Rack x1 pack**  
4 meter gear rack  
with screw and nuts